

MASTER SERIES

10 ~ 30KVA
3:1 Phase PF : 0.8



ON LINE
OUTPUT: 231 V

► CONTROL PANEL

**ISOLATION
TRANSFORMER**
advantage of
NOISE REJECTION



Features

High reliability design

- Double Conversion on-line design, which make the output a pure sine wave source with tracking frequency, phase-lock- and voltage regulation, low distortion and without power fluctuation interference, providing the load with more comprehensive protection.

Strong protection for load

- Built-in isolation transformer, strong anti-interference ability, provides more comprehensive protection.

Wide input range

- Wide input voltage range up to "304~456VAC, avoid frequently switching to battery mode, which adapt to the areas with harsh environment.
- Wide input frequency range, ensure all types of fuel generators connected work stable.

Optimization of high-performance battery

- Adapt intelligent battery management(ABM) technology, thus extending battery life and reducing battery maintenance times.
- Advanced floating switching and charging technology maximize the activation of the battery, thus saves the charging time and extends the battery life.

Battery cold start function


- The UPS can be start directly by battery group when no utility access in, which meets the emergent needs of user.
- Strong cold start ability, which can do the cold start operation when full load.

User-friendly network management

- Communication with computer can be realized by RS232 with corresponding monitoring software. The various parameters can be shown on the communication interface.
- External SNMP adapter. The UPS with remote network management capability can provide real-time data for communication and management through a variety of network management systems.

Comprehensive and reliable protection

- Self-diagnosis function before start-up, avoid the risks that the failure may lead to.
- The multi-protection such as overload, short-circuit, over-temperature, battery under voltage, battery over-charge and so on greatly ensure the system stability and reliability.

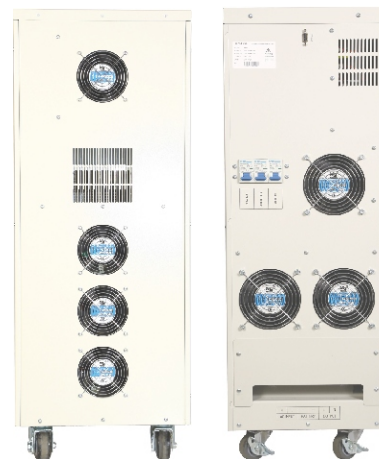

► REAR PANEL

- RS232 port
- Input breaker
- FAN
- Connection Box
- Entrance Hole
- Active wheel

Technical Specifications :



MODEL	M 10	M 12	M 15	M 20	M 25	M 30
Capacity (KVA / KW)	10 / 8	12 / 9.6	15 / 12	20 / 16	25 / 20	30 / 24
INPUT						
Operating voltage range	380Vac(±20%), (3Ph+N+PE)					
Operating frequency range	50/60Hz (±5%)					
Power factor	>0.97 (with filter)					
OUTPUT						
Output voltage	220Vac(±0.5%) / 230Vac(±0.5%)					
Output frequency	50/60Hz(±0.5%)					
Crest factor	3:1 (max)					
Efficiency	> 92% online					
Harmonic distortion (THD)	<1.5% (Linear Load)					
Power Factor	0.8 (0.9 Optional)					
BATTERY						
Battery Voltage	192 VDC					240 VDC
Battery Types	SMF VRLA / TUBULAR					
SYSTEM FEATURES						
Transfer Time	0 ms (Line mode ↔ Battery mode)					
Overload	>125% : 1min, >150%: 200ms					
LED display	Battery low, Mains status, Inverter, Bypass, UPS failure, Overload					
LCD display	I/O voltage, frequency, Battery voltage, Load percentage, Internal temperature					
Communication interface	RS232, SNMP (optional), Dry contact (optional)					
ENVIRONMENTAL						
Operating temperature	0 ~ 40°C					
Storage temperature	-25°C ~ 55°C					
Humidity range	0 ~ 95% (non-condensing)					
Altitude	<1500m					
Noise level	<55dB					
PHYSICAL						
Dimension W x D x H (mm)	305 x 585 x 864		409 x 798 x 1044			555 x 741 x 1200
Net weight (kg)	132	138	200	236	255	315
STANDARDS						
Safety	IEC/EN62040-1;IEC/EN60950-1					
EMC	IEC/EN62040-2;IEC61000-4-2;IEC61000-4-3;IEC61000-4-4;IEC61000-4-5;IEC61000-4-6;IEC61000-4-8					

Specifications are subject to change without prior notice.

EPROMPT ENTERPRISE®

Address : Plot No. 37 to 41, Shiv Shambhu Industrial Estate, Nr. Chosath Jogania Mata Mandir, South Zone Office Road, Udhna Magdalla Road, Surat-395002.

E-Mail : eprompt_enterprise@yahoo.com / **Web :** www.epromptenterprise.com

Ph. : 0261-2636775 / **Mob:-** +91 98251 18183 / +91 93282 77441 / +91 93282 77449